



RECHARGE GOLD MERCHANDISER

G-SERIES

FEATURES

- **Exterior Dimensions (DH):** 24.5" x 38"
- **Internal Volume:** 2.12 ft³
- **Footprint:** 4.17 sq.ft.
- **Expand Your Cold Drink Availability, No Longer Are You Restricted by the Availability of Electric Power**
- Unique Refrigeration System Designed for Use in Multiple Operating Environments Where Electricity is Not Available
- Designed to Maintain Ice Cold Beverage Temperatures for 12 Hours or More
- Tested to Meet the Most Stringent Performance Guidelines *
- Climate-Friendly Natural Refrigerant
- Stimulate Impulse Sales in Any High Traffic Location:
 - Convenience Retail
 - Petroleum
 - Concessions/Stadium
 - Cafeteria
 - Special Events
 - Kiosks
- Heavy Duty Casters for Mobility and Flexibility of Placement at Retail
- Quick-Change Two Sided Graphic Panels
- CFC-Free Insulation
- 9' Cord with Cord Management System

* RCM will maintain average 35-40°F drink temperature in a 90°F environment for 12 hours without power. Actual performance may vary depending on operating environment.



U.S. Patent Nos. 8,215,125 and 9,038,412

CERTIFICATIONS

110-120V/60Hz



- UL471
- NSF/ANSI-7: Beverage Cooler



The specifications contained herein are for illustrative marketing purposes only and are not intended to be relied upon in whole or in part. All creative works are the sole property of IDW, Inc. Any reproduction in part or as a whole without written permission from IDW, Inc. is prohibited.

IMPULSE COOLER

TECH SPECS

| | |
|---------------|---------------|
| Refrigerant | R600a |
| Amps | 1.3 |
| Volts/Hz | 110-120V/60Hz |
| Compressor HP | 1/8 |

DIMENSIONS

| | |
|-----------------|----------------------|
| Exterior (DH) | 24.5" x 38" |
| Basket (DH) | 15.25" x 17.75" |
| Internal Volume | 2.12 ft ³ |

SHIPPING SPECS

| | |
|------------------------------------|-----------------------------------|
| Gross Weight | 128 lbs |
| Net Weight | 115 lbs |
| Carton Dims (WDH) | 26" x 26" x 41" |
| Units per Pallet | 4 |
| Shipping Options (Floor Loaded) | 20' ~48 40'HQ ~102 53' ~132 |

PACKOUT CAPACITIES



| | Total Capacity |
|---|----------------|
|  | 64 |
|  | 44 |
|  | 34* |



U.S. Patent Nos. 8,215,125 and 9,038,412

EXTERIOR DIMENSIONS

INTERIOR DIMENSIONS

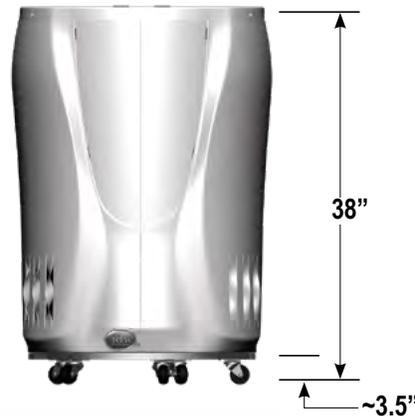

* 20oz pack-outs may vary depending on package size.



The specifications contained herein are for illustrative marketing purposes only and are not intended to be relied upon in whole or in part. All creative works are the sole property of IDW, Inc. Any reproduction in part or as a whole without written permission from IDW, Inc. is prohibited.

8825 Boston Place, Rancho Cucamonga CA 91730 | Toll: 877.307.2665 | Office: 909.447.8254 | Fax: 909.305.8756

Last Updated: August 19, 2021 3:17 PM

* For best performance allow 24 hours for initial charge and load with prechilled products.

** RCM will maintain average 35-40°F drink temperature in a 90°F environment for 12 hours without power. Actual performance may vary depending on operating environment.

U.S. Patent Nos. 8,215,125 and 9,038,412

RCM-77



RECHARGE COLD MERCHANDISER

G-Series Coolers

